


TEXSTYLE

NORDIC TEXTURES

ALTRO RECYCLED



50% Recycled polyester
45% Polyester 5% Acrylic
500 kg of plastic per 1000 m
720 g/m²
142 cm

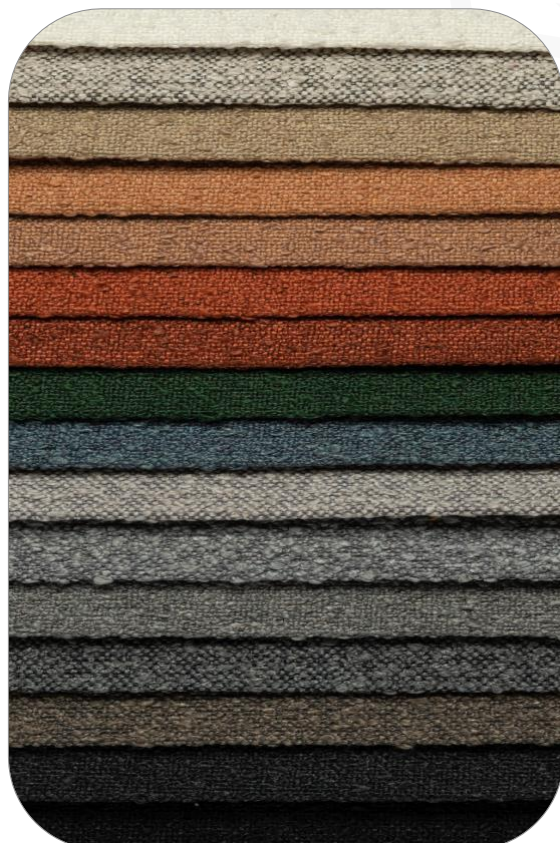

SPECIFICATIONS

Abrasion resistance

ISO 12947-2:2016 > 79.000 rubs.

Pilling

EN ISO 12945-2:2000 Rate 4.

Colour fastness to light

ISO 105-B02:2014 Rate 5.

Colour fastness to rubbing

DIN EN ISO 105-X12:2016-11:

Wet 4-5, Dry 4-5.

Resistance to seam slippage

Warp (mm) 2, Weft (mm) 3.

Flame retardant

Ca Tb 117-2013 (USA).

& upon requirement can pass:

BS 5852 (UK)

Performance

Custom requirements will be followed.

Environment

REACH Compliance.

OEKO-TEX Standard 100.

Formaldehyde Free. EN ISO 14184-1:2011

Washability

Easy to clean by hand.

Vacuum clean frequently using a furniture nozzle. Remove stains as soon as they occur using a casual kitchen cloth, soap and mild water. Do not use strong cleaning or bleaching agents. Machine washable at 30 °.



OEKO-TEX®
CONFIDENCE IN TEXTILES



texstyle.dk